


**IB Blind Rivets ( Steel / Steel )**



Setting of Anlock blind rivets

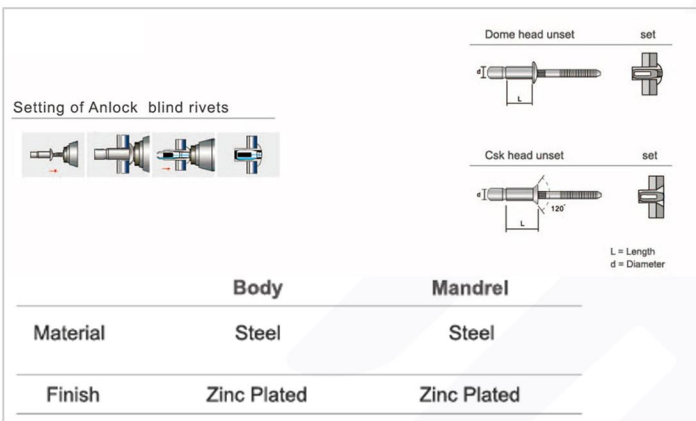

Dome head unset set  
 Csk head unset set

L = Length  
 d = Diameter

	Body	Mandrel
Material	Steel	Steel
Finish	Zinc Plated	Zinc Plated

**Features :**

- The blind rivet with a multigrip clamping range and a high tensile and shear strength offers a high resistance to vibrations and a good watertight connection, After setting the rest mandrel is retained in the body permanent because of the special mandrel locking system.

**Advantages :**

- High shear and tensile strength
- Superior holding power
- Fastener over wide grip range
- Locking prevents loosening of mandrel from vibration

**Application :**

- Truck building & containers
- Automotiv
- Construction & coach work

**Product Specification**

Dia (d) mm/inch	Length (L) mm/inch		Grip Range mm/inch		Shear (n) mm/inch		Tensile (n) mm/inch		Part Number
	mm	inch	mm	inch	mm	inch	mm	inch	
4.8(3/16") 4.93-5.18(.194-.204)	10.0	.394	1.6-6.3	.063-.248	5700	1281	4400	989	IBSS48100D
	14.0	.551	5.5-11.0	.217-.433					IBSS48140D
6.4(1/4") 6.63-7.01(.261-.276)	14.0	.551	2.1-9.5	.083-.374	10600	2383	8200	1843	IBSS64140D
	19.0	.748	8.9-15.8	.350-.622					IBSS64190D

**Manufacturer & Importer**

Panel Door Lock / Panel Door Hinges / Latches / Door Handles / Blind Rivet Nut / Mono-Bolt Rivets  
 Self Clinching Fasteners / Door gaskets / Fan Filters / Drawer Sliding Channel