

HP Blind Rivets (AA / AA)



Features :

→ High Strength blind rivet has exceptional strength for pull out and high shear strength. The mandrel is positively retained or setting and the tight formation is spread to provide a large bearing area. The external mandrel head feature provides neat appearance on setting.



Advantages :

- Locked, rattle free mandrel
- Superior shear and tensile strength
- provides excellent integrity
- Fills irregular holes

Application :

- Truck building & containers
- Automotive
Construction & coach work

Setting of High Strength blind rivets

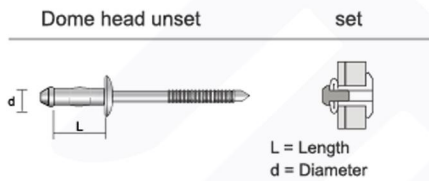

	Body	Mandrel
Material	Stainless Steel	Stainless Steel
Finish	Polished	Polished

Product Specification

Dia (d) mm/inch	Length (L) mm/inch		Grip Range mm/inch		Shear (n) n / lbs		Tensile (n) n / lbs		Part Number
6.4(1/4") 6.7-6.9(.264-.272)	10.5	.413	2.8-4.8	.110-.189	6000	1349	2670	599	HPAA64105D
	12.5	.492	4.8-6.8	.189-.268	6500	1461			HPAA64125D
	14.5	.571	6.8-8.8	.268-.346	7000	1574			HPAA64145D
	16.5	.650	8.8-10.8	.346-.425					HPAA64165D

Manufacturer & Importer

Panel Door Lock / Panel Door Hinges / Latches / Door Handles / Blind Rivet Nut / Mono-Bolt Rivets
 Self Clinching Fasteners / Door gaskets / Fan Filters / Drawer Sliding Channel